


### Characteristics

Model	AD22-22
Panel cutout diameter	22mm, others on request
Light source	Integral LED
Rated voltage	24/36/110/220V, DC/AC 50-60Hz
Withstand voltage	2.5kV – 1 minute
Impulse voltage	6kVp
Voltage tolerance	±20%
Power consumption	≤20mA
Continuous working life	≥30000 hours
Index protection	IP40 (front face), IP20 (body)
Shade colour	Amber/Green/Red/White, others on request
Overall dimension (W x H x D) / weight	29 x 29 x 52mm / 0.02kg
Terminal assignment	X1 – X2
Panel thickness supported	1 – 6mm
Standard compliance	IEC/EN 60947-5-1

<b>Environment</b>	
Storage ambient temperature	-40°C to +70°C
Operating ambient temperature	-25°C to +55°C
Relative humidity	≤98%
Installation category	3
Pollution degree	3
Altitude	≤1000m

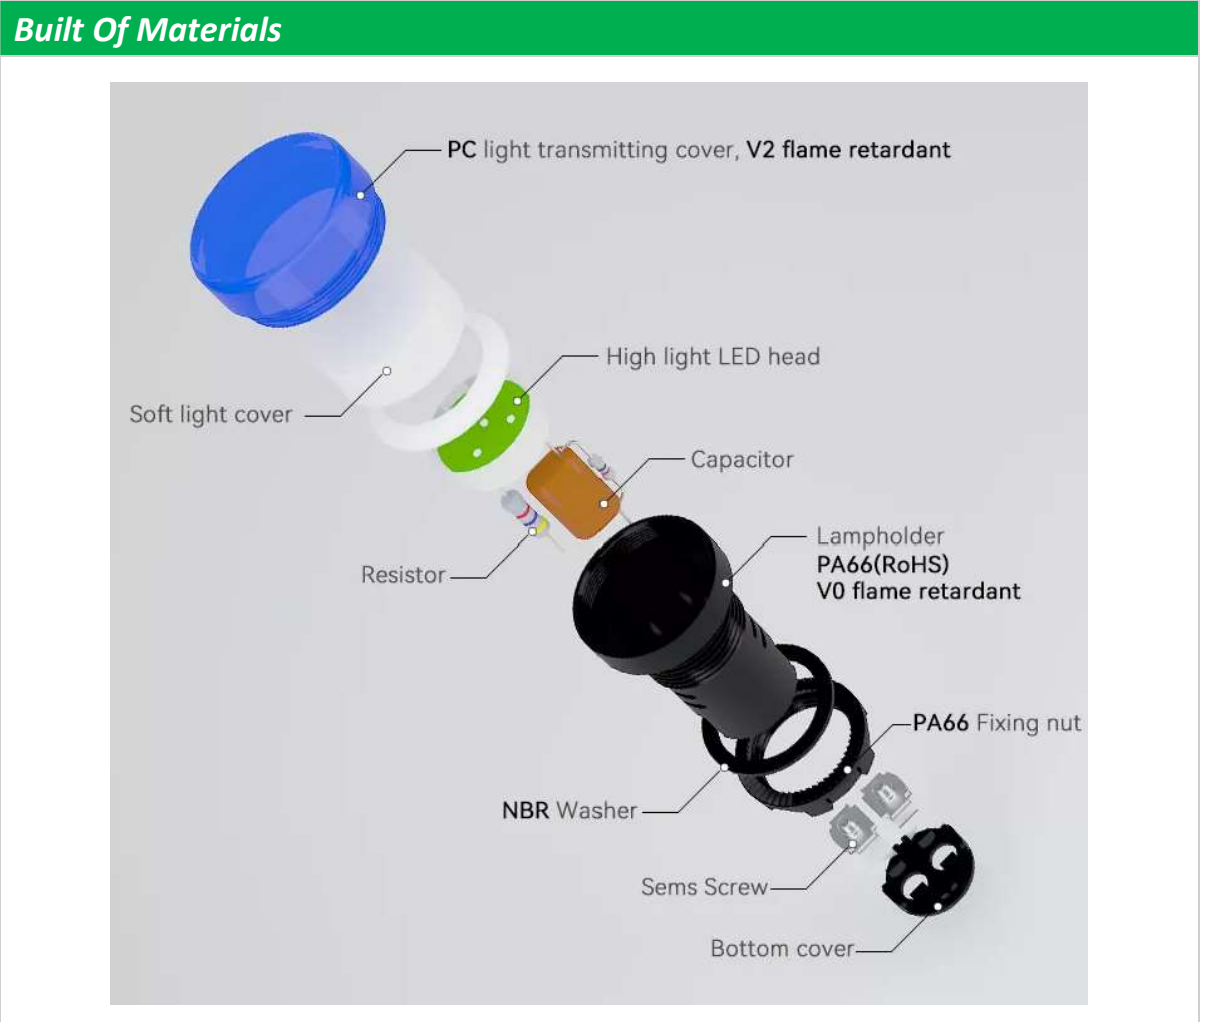

<b>PART SKU</b>		
<b><u>AD22-22</u></b>		
Indicator Lamp, 22mm, IP40	Green – 24V DC	<b>AD22-22DS-G24SMD</b>
Indicator Lamp, 22mm, IP40	Green – 36V DC	<b>AD22-22DS-G36SMD</b>
Indicator Lamp, 22mm, IP40	Green – 110V DC	<b>AD22-22DS-G110SMD</b>
Indicator Lamp, 22mm, IP40	Green – 220V DC	<b>AD22-22DS-G220SMD</b>
Indicator Lamp, 22mm, IP40	Red – 24V DC	<b>AD22-22DS-R24SMD</b>
Indicator Lamp, 22mm, IP40	Red – 36V DC	<b>AD22-22DS-R36SMD</b>
Indicator Lamp, 22mm, IP40	Red – 110V DC	<b>AD22-22DS-R110SMD</b>
Indicator Lamp, 22mm, IP40	Red – 220V DC	<b>AD22-22DS-R220SMD</b>
Indicator Lamp, 22mm, IP40	Amber – 24V DC	<b>AD22-22DS-A24SMD</b>
Indicator Lamp, 22mm, IP40	Amber – 36V DC	<b>AD22-22DS-A36SMD</b>
Indicator Lamp, 22mm, IP40	Amber – 110V DC	<b>AD22-22DS-A110SMD</b>
Indicator Lamp, 22mm, IP40	Amber – 220V DC	<b>AD22-22DS-A220SMD</b>
Indicator Lamp, 22mm, IP40	White – 220V DC	<b>AD22-22DS-W220SMD</b>
**For other voltage and color configuration, please consult us.		